SXK-SGZ01/N/DUO/DL

Tripod Turnstile

Product Function

The SXK-SGZ01 provides controlled pedestrian entry for offices, schools and transport facilities. A valid access signal releases the mechanism for one person to pass. In the standard semi-automatic configuration, users push the arms to enter and lift the dropped arm manually after power is restored. Dry-contact control supports integration with third-party access systems.



SGZ01



SGZ01-N



SGZ01-DUO



SGZ01-DL

Throughput	Passage width	Rated power
25-40 persons/min	Up to 600 mm	60 W

Features

Emergency drop arm. The horizontal arm can drop to clear the lane in an emergency.

Stainless steel construction. SUS304 cabinet and arms support indoor and outdoor use.

Smooth passage. An electromagnetic mechanism with hydraulic buffering supports controlled rotation.

Clear guidance. Pictograms indicate access permission and direction of movement.

Flexible integration. Reader mounting plates and dry-contact interfaces accommodate third-party controllers.

Automatic option. A fully automatic brushless mechanism is available as an alternative to the standard semi-automatic unit.

Application Scenarios





Office entrances, schools, scenic spots, bus stations and other managed pedestrian checkpoints. Combine readers and guide rails to arrange single or multiple controlled lanes.


Example lane arrangement; readers, rails and finishes depend on the selected configuration.

Technical Parameters


Parameter	Specification
Model / product type	SXK-SGZ01 / N/Duo /DL Tripod Turnstile
Cabinet size L x W x H	SGZ01: 1200 x 280 x 980 mm SGZ01N: 1200 x164 x980 mm SGZ01-DUO: 1200 x 450 x 980 mm SGZ01-DL: 1600 x280 x 980 mm
Clear passage width	550- 600 mm;
Throughput	25-40 persons/min
Rated power	60 W
Cabinet material	SUS304 stainless steel
Standard mechanism	Semi-automatic electromagnetic mechanism with hydraulic buffer
Optional mechanism	Fully automatic brushless motor mechanism
Control input and output	Dry contact / relay signal
Optional communication	RS485 / RS232 / TCP/IP
Emergency function	Drop arm for emergency passage
MCBF	5 million cycles, electromagnetic; 8 million cycles, brushless option
Gross weight	65 kg for SGZ01
Ingress protection	IP54
Operating temperature	-28℃~+75℃
Operating humidity	5-85%
Working environment	Indoor / outdoor

Size Drawing


SGZ01

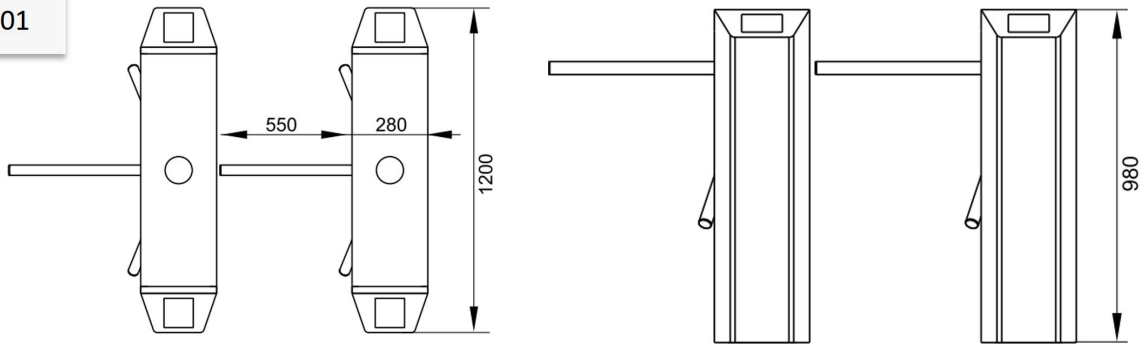


SGZ01-N

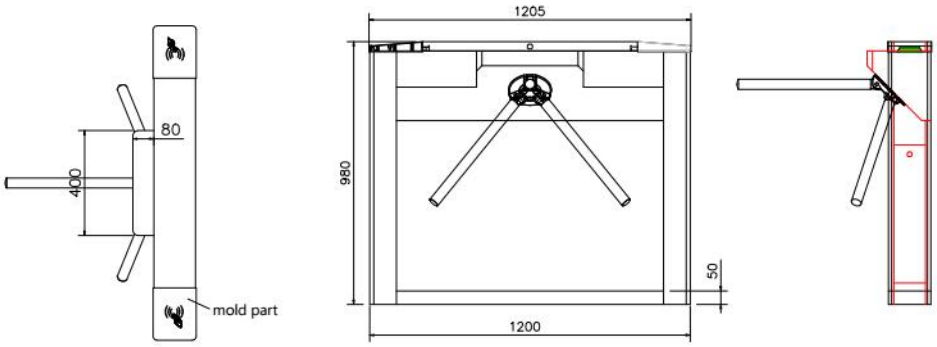

SGZ01-DUO

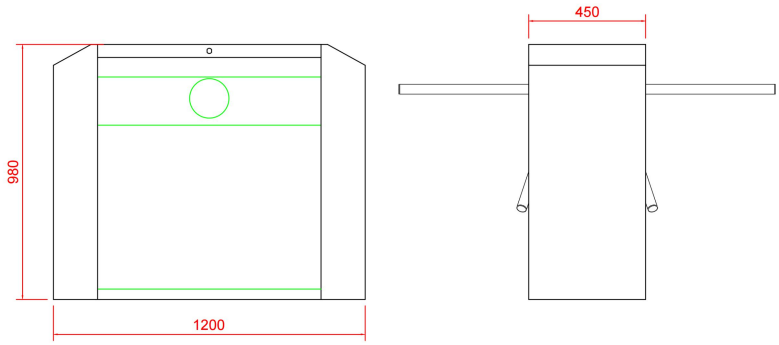

SGZ01-DL

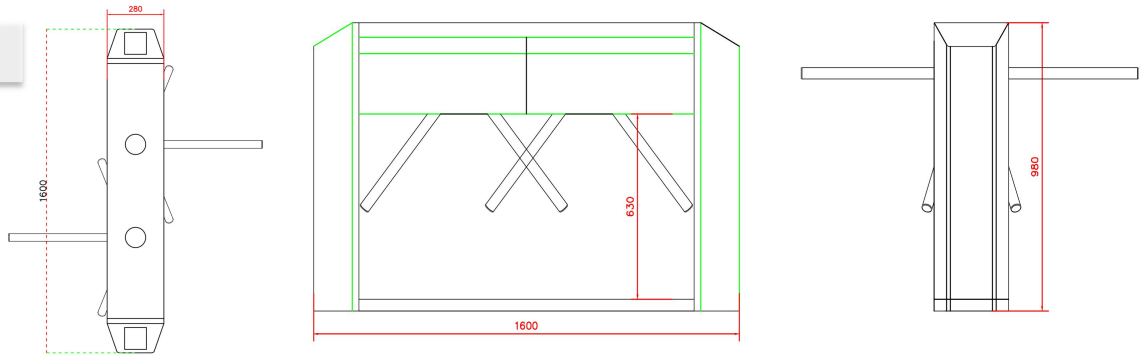

Dimensions in mm.

Integration and Ordering

Specify the mechanism type, passage direction, lane layout and reader system.

Thinkpark Technology Co., Ltd | sales@sxkchina.com tom@autobarriergate.com

Specifications are subject to change without notice. Confirm the final configuration and approved installation drawing before ordering.